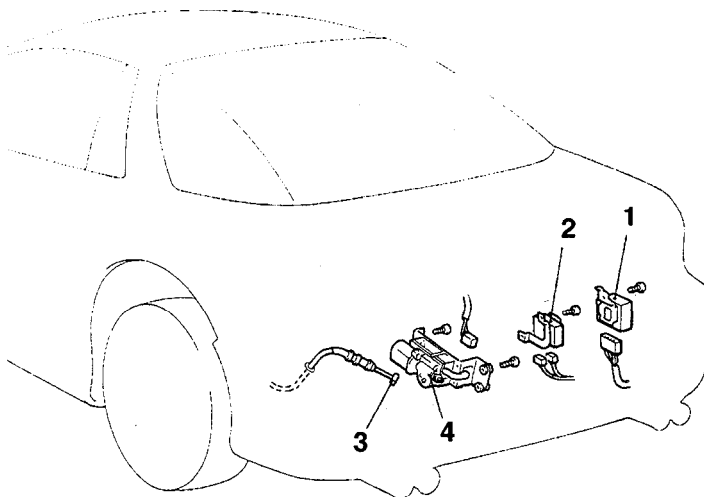
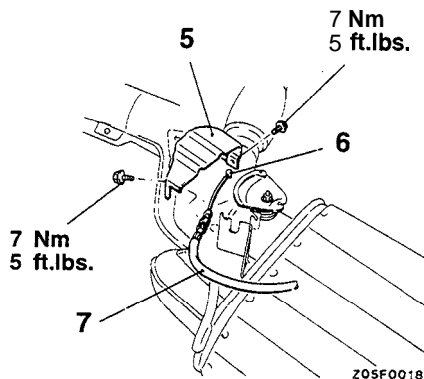



ACTIVE EXHAUST SYSTEM <Up to 1994 models>**REMOVAL AND INSTALLATION****Pre-removal and Post-installation Operation**

- Rear Side Trim (LH) Removal and installation
(Refer to GROUP 52A – Trims.)

**Removal steps**

- B◄ 1. Active exhaust system control module
2. Cable connection (Actuator side)
3. Actuator


- A◄ 4. Protector
5. Cable connection (Muffler side)
6. Cable

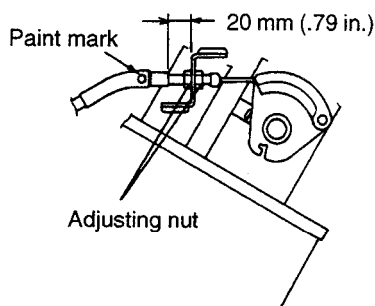
**INSTALLATION SERVICE POINTS****►A◄ CABLE INSTALLATION (Muffler Side)**

Install with the paint mark facing up and adjust the adjusting nut to obtain the illustrated dimension.

►B◄ CABLE INSTALLATION (Actuator Side)

After adjusting the cable on the muffler side, adjust the adjusting nuts for an inner cable play of 0 to 1 mm (0 to .04 in.).

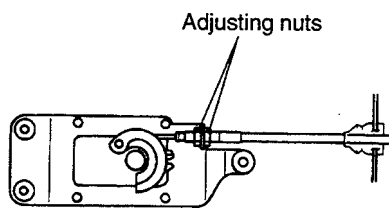


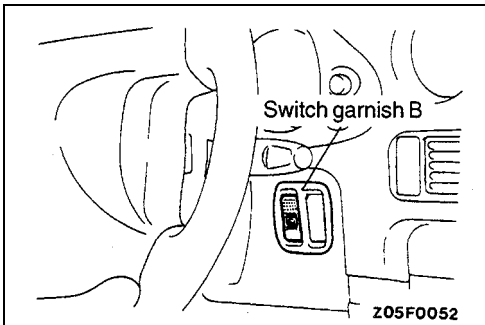

INSPECTION

ACTIVE EXHAUST SWITCH CHECK

(1) Remove switch garnish B from the knee protector.

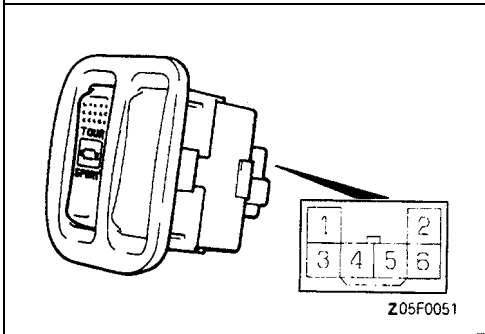

(2) Operate the switch and check the continuity between the terminals.

Switch position	Terminal No.					
	2	3	5	6	1	4
TOUR	0	n		○		
SPORT						